



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ QTY: _____

ENCORE PART NO. _____

Encore® Wall Mount Spout Base with Rigid Gooseneck Spout

KL72-900x-R Series

KL72-9000-R 3" Spout
KL72-9001-R 8" Spout
KL72-9002-R 6" Spout

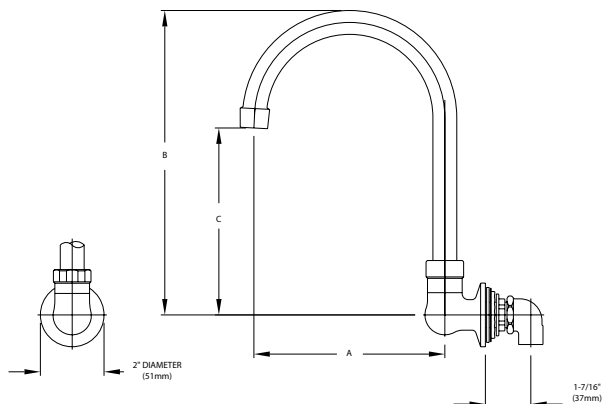

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) hole for backsplash is recommended to accommodate 1/2" supply nipple
1/2" NPT Female Inlet
Operating Temperature: 40-180°F (5-83°C)
Operating Pressure: 15-125psi

Approximate shipping weight - 2 lbs
Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Rigid gooseneck spout design
- Leak proof double O-ring spout design
- Stainless steel spout

SPECIFICATIONS:

Wall Mount Spout Base to be Encore KL72 Series in the following configuration:

____ KL72-9000-R 3" Spout
____ KL72-9001-R 6" Spout
____ KL72-9002-R 8" Spout

Faucet base to be constructed of polished chrome plated brass. Spout to be stainless steel rigid gooseneck style with leak proof double O-ring seal design. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL72-9000-R	3-1/2" (89mm)	8" (203mm)	6-3/16" (157mm)
KL72-9001-R	8-1/2" (216mm)	11-15/16" (303mm)	6-7/16" (164mm)
KL72-9002-R	6" (152mm)	9-1/4" (235mm)	5-15/16" (151mm)

COMPLIES WITH:
THE FEDERAL "REDUCTION OF LEAD
IN DRINKING WATER ACT" -
2011 - US SENATE BILL NO. S.3874
NSF/ANSI 61/9, ANNEX G

